	FLOWMETER DIMENSIONS		
DIM.	RMA	RMB	RMC
A	4 9/16 [115.9]	8 1/2 [215.9]	15 1/8 [384.2]
B	3 [76.20] 1/8 NPT CONN.	6 7/16 [163.5] 1/4 NPT CONN.	12 1/4 [311.2] 1/2 NPT CONN.
C	1 5/8 [41.28] 10-32 MTG. HOLES	3 15/16 [100.0] 1/4-20 MTG. HOLES	8 3/4 [222.3] 3/8-24 MTG. HOLES
D	3/8 [9.525]	5/8 [15.88]	1 [25.40]
E	1 1/16 [26.99]	1 7/8 [47.63]	2 3/4 [69.85]
F	1 3/16 [30.16]	1 3/4 [44.45]	2 1/2 [63.50]
G	11/16 [17.46]	1 [25.40]	1 7/16 [36.51]
H	61/64 [24.21]	1 7/16 [36.51]	1 31/32 [50.00]
I	1 3/8 [34.92]	1 13/16 [46.04]	2 1/2 [63.50]
J	3/4 [19.05]	1 1/4 [31.75]	2 [50.80]
K	4 13/16 [122.2]	8 3/4 [222.3]	15 3/8 [390.5]
L	1 [25.40]	1 1/2 [38.10]	2 1/4 [57.15]

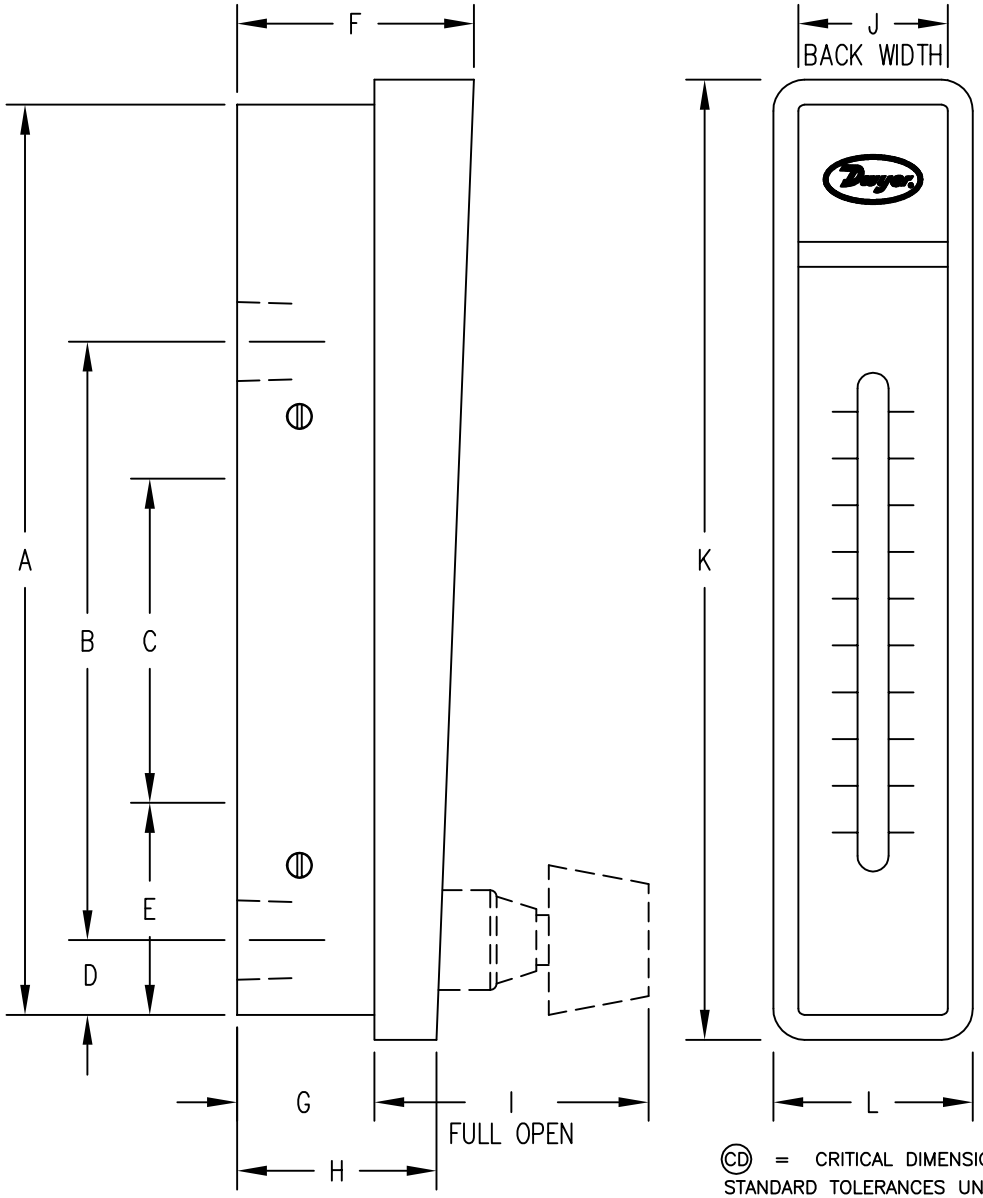

CD = CRITICAL DIMENSION

STANDARD TOLERANCES UNLESS NOTED:
ALL DECIMAL DIMENSIONS ± .005
ALL ANGLES ± 1°

NO.	CHANGES	BY/DATE

DATE
DWN BY
CHKD
APPD

NAME

OUTLINE DIMENSIONS
RMA, RMB, & RMC
SERIES FLOWMETER

ACAD2002

MATERIAL

FINISH

FR. NO.

NOTICE: This drawing and the principles and elements of design embodied therein are the exclusive to be communicated, disclosed, reproduced or used except as previously authorized in writing by su parties for examination without the written consent of said corporation.